



# NX 915-A

PROFESSIONAL ACTIVE SPEAKER



## Description

NX 915-A is masterfully engineered from the ground up to deliver stellar audio performance for solo musicians, bands, and DJs. The combination of 1.75" compression driver, 15" woofer, two-channel 2100W amplifier, and a constant directivity waveguide produces coherent 100° x 60° coverage for the listening area with up to 131 dB SPL, distortion-free sound. Used stand-alone speaker for FOH system, satellite (with subwoofer), stage monitor, or flown speaker, the NX 915-A blends high-performance and reliability in a compact package. Blending RCF proprietary FIRPHASE and Bass Motion Control DSP processing, NX 9 Series speakers are perfectly tuned for each model, delivering absolute clarity and deep, powerful bass response. The tour-ready, rugged all-wood cabinet is easy to carry and secure to install on a pole-, flown-, wall-, or truss-mounted using the dedicated rigging points available.

## Features

- › Up to 131 dB Sound Pressure Level
- › 2100W Class-D Bi-Amplification
- › 45-20000 Hz linear frequency response
- › 1.75" Compression Driver
- › 15" Woofer
- › FIRPHASE zero degrees phase technology
- › Bass Motion Control woofer excursion management

## Part Number


13000674 NX 915-A	220-240 V	Black	EAN 8024530018979
13000690 NX 915-A	115 V	Black	EAN 8024530019051



# NX 915-A

## PROFESSIONAL ACTIVE SPEAKER

Line Art 2D

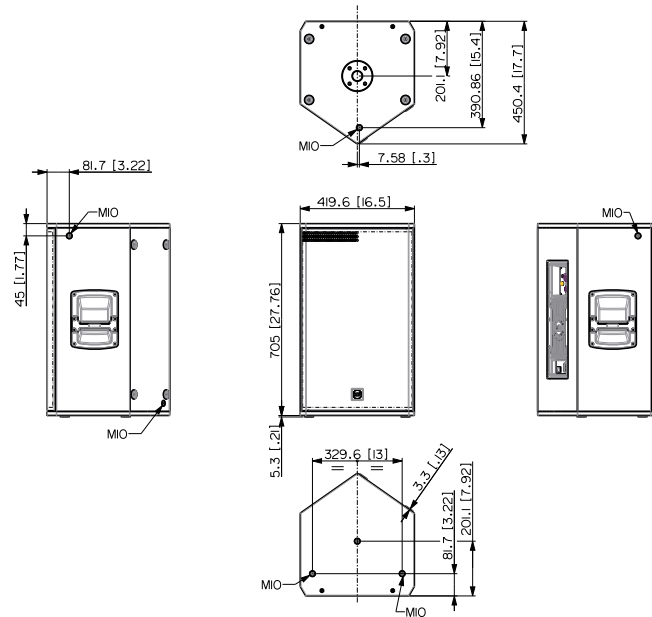

### TECHNICAL SPECIFICATIONS

<b>Acoustical specifications</b>	Frequency Response	45 Hz ÷ 20000 Hz
	Max SPL @ 1m	131 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	60°
<b>Transducers</b>	Compression Driver	1 x 1.0", 1.75" v.c
	Woofer	1 x 15", 2.5" v.c
<b>Input/Output section</b>	Input signal	bal/unbal
	Input connectors	XLR, Jack
	Output connectors	XLR
	Input sensitivity	-2 dBu/+4 dBu
<b>Processor section</b>	Crossover Frequencies	1600 Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
<b>Power section</b>	Controls	Linear, Boost, Stage, Volume
	Total Power	2100 W Peak
	High frequencies	700 W Peak
	Low frequencies	1400 W Peak
<b>Standard compliance</b>	Cooling	Convection
	Connections	VDE
	Safety agency	CE compliant
<b>Physical specifications</b>	Hardware	2 x M10 Top, 1 x M10 each side, 1 x M10 bottom, 1 x M10 rear
	Handles	1 x Each Side
	Pole mount/Cap	Yes
	Color	Black
<b>Size</b>	Height	705 mm / 27.76 inches
	Width	420 mm / 16.54 inches
	Depth	451 mm / 17.76 inches
	Weight	24.1 kg / 53.13 lbs



# NX 915-A

PROFESSIONAL ACTIVE SPEAKER

	<b>ACCESSORIES</b>		
<b>Cables</b>	AC XLR 3M3F	13360102	8024530006402
<b>Protections</b>	CVR NX 915	13360497	8024530019501
<b>Rigging / Mounting</b>	2X PLATE H-BR NX 910-912-915	13360506	8024530020057
	AC EB 4X	13360031	8024530018870
	AC PMX	13360232	8024530010058
	AC PRO-FS	13360109	8024530006471
	AC PRO-PM	13360110	8024530006488
	H-BR 2X COMPACT C 45	13360493	8024530019938
	PM-KIT M20	13360067	8024530014599