



# NX 915-SMA

PROFESSIONAL ACTIVE STAGE MONITOR



## Description

NX 915-SMA speaker is a stage monitor designed for sound providers, musicians, bands, and DJs. The combination of a 1.75" compression driver, 15" woofer, two-channel 2,100W amplifier, and the TRW waveguide produces coherent 100° x 70° coverage for the listening area with up to 131dB SPL of distortion-free sound. Used as a stage monitor, stand-alone speaker system, or satellite paired with a subwoofer, the NX 915-SMA blends high performance and reliability in a compact package. Combining RCF proprietary FIRPHASE and Bass Motion Control DSP processing, NX 915-SMA Series speakers deliver absolute clarity and deep, powerful bass response. The tour-ready, rugged all-wood cabinet is easy to carry and set up on stage or on a pole.

## Features

- › Up to 131 dB Sound Pressure Level
- › 2100W Class-D bi-amplification
- › 45-20000 Hz linear frequency response
- › 1.75" Compression Driver
- › 15" Woofer
- › FIRPHASE zero degrees phase technology
- › Bass Motion Control woofer excursion management
- › 70°x100° Constant Directivity Coverage Angle
- › Perfectly tailored for horizontal or vertical deployment

## Part Number

13000785 NX 915-SMA  
13000786 NX 915-SMA

220-240 V  
100-120 V

Black  
Black


EAN 8024530020552  
EAN 8024530020583



# NX 915-SMA

PROFESSIONAL ACTIVE STAGE MONITOR

Line Art 2D

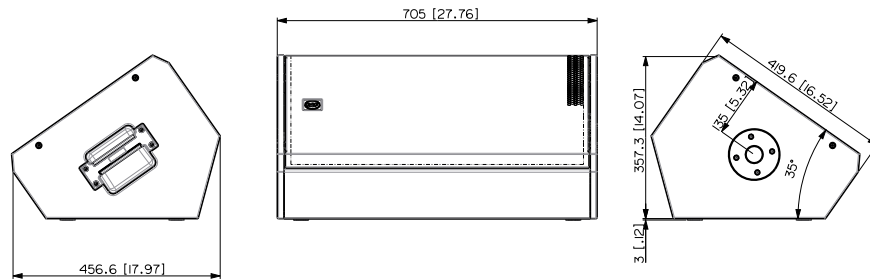

## TECHNICAL SPECIFICATIONS

<b>Acoustical specifications</b>	Frequency Response	45 Hz ÷ 20000 Hz
	Max SPL @ 1m	131 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	70°
<b>Transducers</b>	Compression Driver	1 x 1.0", 1.75" v.c
	Woofer	1 x 15", 2.5" v.c
<b>Input/Output section</b>	Input signal	bal/unbal
	Input connectors	Combo XLR/Jack
	Output connectors	XLR
	Input sensitivity	-2 dBu/+4 dBu
<b>Processor section</b>	Crossover Frequencies	1600 Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
<b>Power section</b>	Total Power	2100 W Peak
	High frequencies	700 W Peak
	Low frequencies	1400 W Peak
	Cooling	Convection
	Connections	Powercon TRUE1 TOP IN/OUT
<b>Standard compliance</b>	Safety agency	CE compliant
<b>Physical specifications</b>	Handles	1 on side and 1 on top
	Pole mount/Cap	Yes
	Color	Black
<b>Size</b>	Height	357.3 mm / 14.07 inches
	Width	705 mm / 27.76 inches
	Depth	456.6 mm / 17.98 inches
	Weight	23.8 kg / 52.47 lbs
	<b>ACCESSORIES</b>	
<b>Cables</b>	AC XLR 3M3F	13360102      8024530006402



# NX 915-SMA

PROFESSIONAL ACTIVE STAGE MONITOR

<b>Protections</b>	CVR 010	13360611	8024530020941
	RP 001	13360515	8024530020460
<b>Rigging / Mounting</b>	AC PMX	13360232	8024530010058
	AC PRO-FS	13360109	8024530006471
	AC PRO-PM	13360110	8024530006488
	PM-KIT M20	13360067	8024530014599